
NUTCON HYDRONIC SPECIALTY PRODUCTS



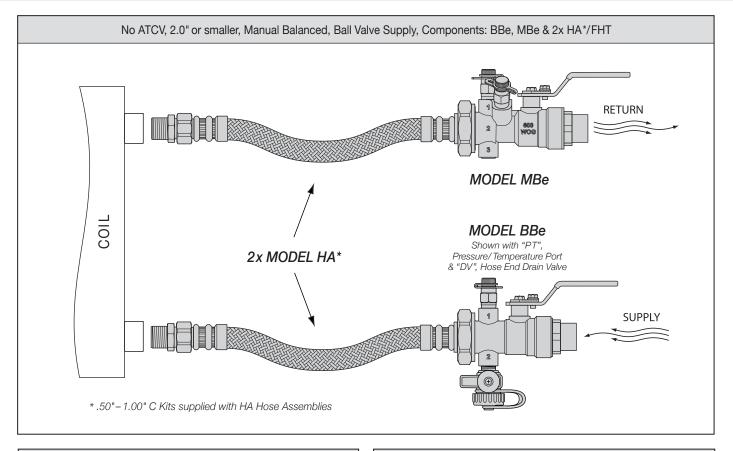

MODEL MBe

MBe Manual Balancing Valve is a venturi balancing and shut off valve. Accuracy \pm 3% of flow rate. Fixed End connection available in FNPT or SWT. Tailpiece connection available in MNPT, FNPT or SWT. Size reductions available. Standard features include Adjustable Memory Stop and Dual Pressure/Temperature Ports.

2x MODEL HA

HA Direct Connect Hose Assemblies offer a direct connection to Valves and Coil Connection Components. Double crimp Stainless Steel ferrules over SS outer braiding with EPDM Rubber Liner. Brass cone seat swivel end with MNPT or SWT adapter. Hose Assembly lengths available in 18", 24" and 36". UL-94 V-0 Flame Resistant Rating.

MODEL BBe

BBe Union End Ball Valve is a throttling and shut off valve. Fixed End connection available in FNPT or SWT. Tailpiece connection available in MNPT, FNPT and SWT. Size reductions available. Standard features include Adjustable Memory Stop and dual plugged accessory ports. *Shown with "PT" Pressure/Temperature Port and "DV" Hose End Drain Valve.*

QUANTITY	SIZE	GPM	TAG
NuTech Hydronic Specialty Products • 2705 Clemens Road, Unit A-101, Hatfield, PA 19440 • 215.361.0373 • NuTech-Valves.com			