


2-Way ATCV on Return, 2.5" or larger, Manual Balanced, Strainer Supply with Ball Valve, Components: SP & MP

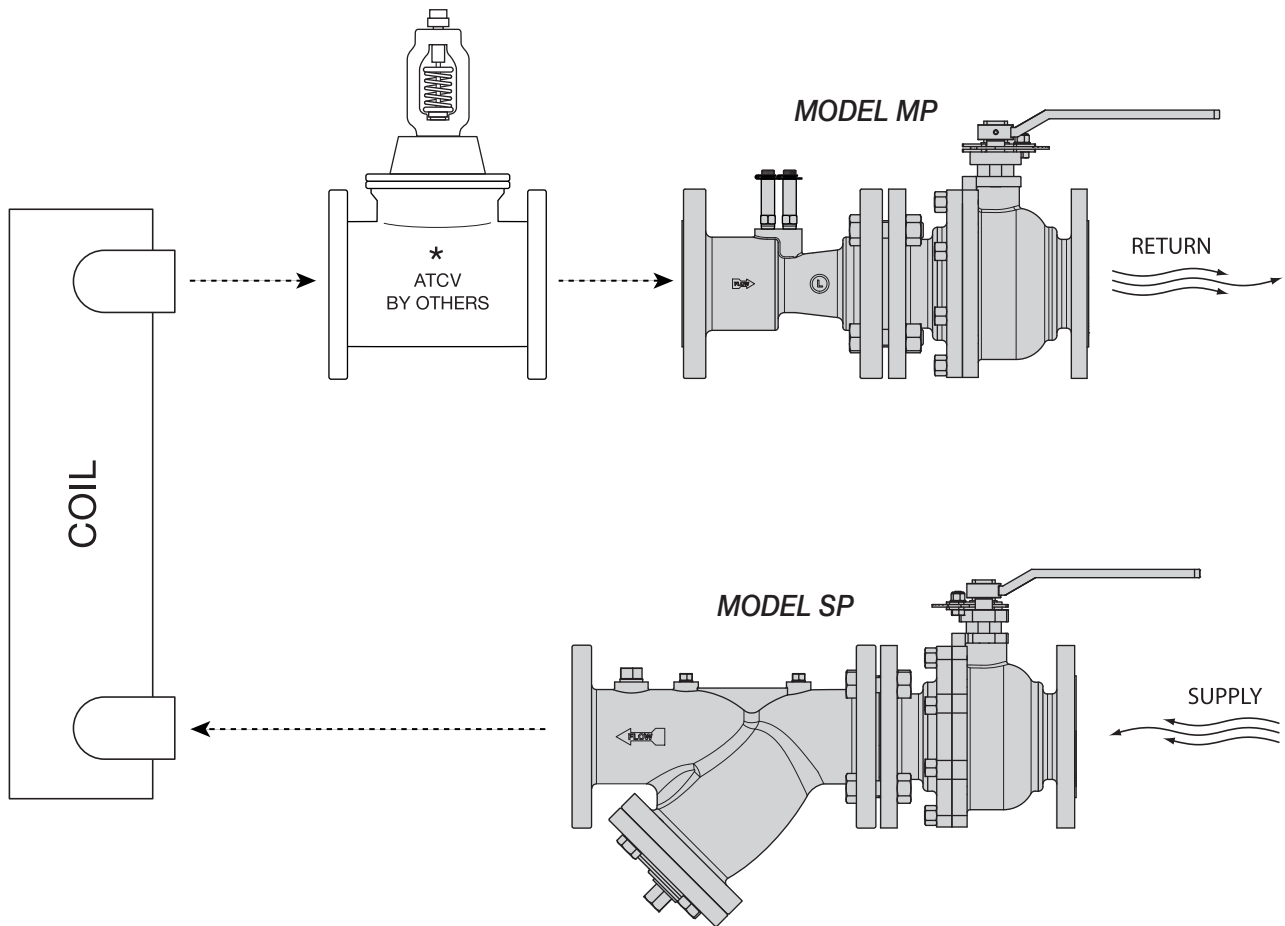

* Actuated Temperature Control Valve (ATCV), pipe and fittings illustrated above are by others and not supplied.

MODEL MP

MP Manual Balancing Valve is a cast steel venturi flow element with accuracy of $\pm 3\%$ of flow rate. Mounted on the discharge is a cast steel ball valve with adjustable flow positioning plate. ANSI 150 flanged end connections. Dual extended length Pressure/Temperature Ports and Hanging I.D. Tag.

MODEL SP

SP Combination Strainer Valve is a "Y" (wye) strainer with removable stainless steel strainer screen, bolted cover with blow down connection and ANSI 125# Flanged End Connections. Mounted on the inlet is a cast steel Ball Valve with adjustable flow positioning plate. Strainer body features three threaded Accessory Ports.

QUANTITY	SIZE	GPM	TAG