


No ATCV, 2.0" or smaller, Ball Valve Balanced, Ball Valve Supply, Components: 2x BBe & 2x HA*/FHT

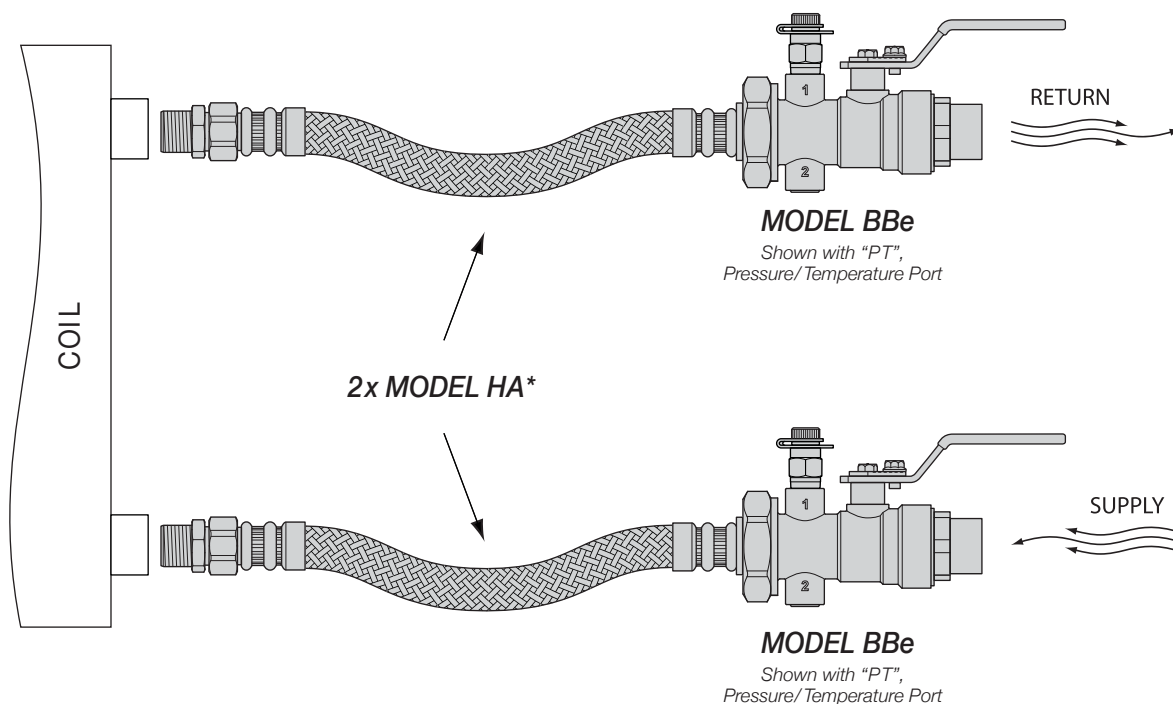

* .50" – 1.00" C Kits supplied with HA Hose Assemblies

2x MODEL BBe

BB Union End Ball Valve is a throttling and shut off valve. Fixed End connection available in FNPT or SWT. Tailpiece connection available in MNPT, FNPT and SWT. Size reductions available. Standard features include Adjustable Memory Stop and dual plugged accessory ports. Shown with "PT" Pressure/Temperature Port.

2x MODEL HA

HA Direct Connect Hose Assemblies offer a direct connection to Valves and Coil Connection Components. Double crimp Stainless Steel ferrules over SS outer braiding with EPDM Rubber Liner. Brass cone seat swivel end with MNPT or SWT adapter. Hose Assembly lengths available in 18", 24" and 36". UL-94 V-0 Flame Resistant Rating.

QUANTITY	SIZE	GPM	TAG