


2-Way PICV on Return, 2.5" or larger, Lug Type Butterfly Valve, Strainer Supply with Lug Type Butterfly Valve, Components: SF & BV

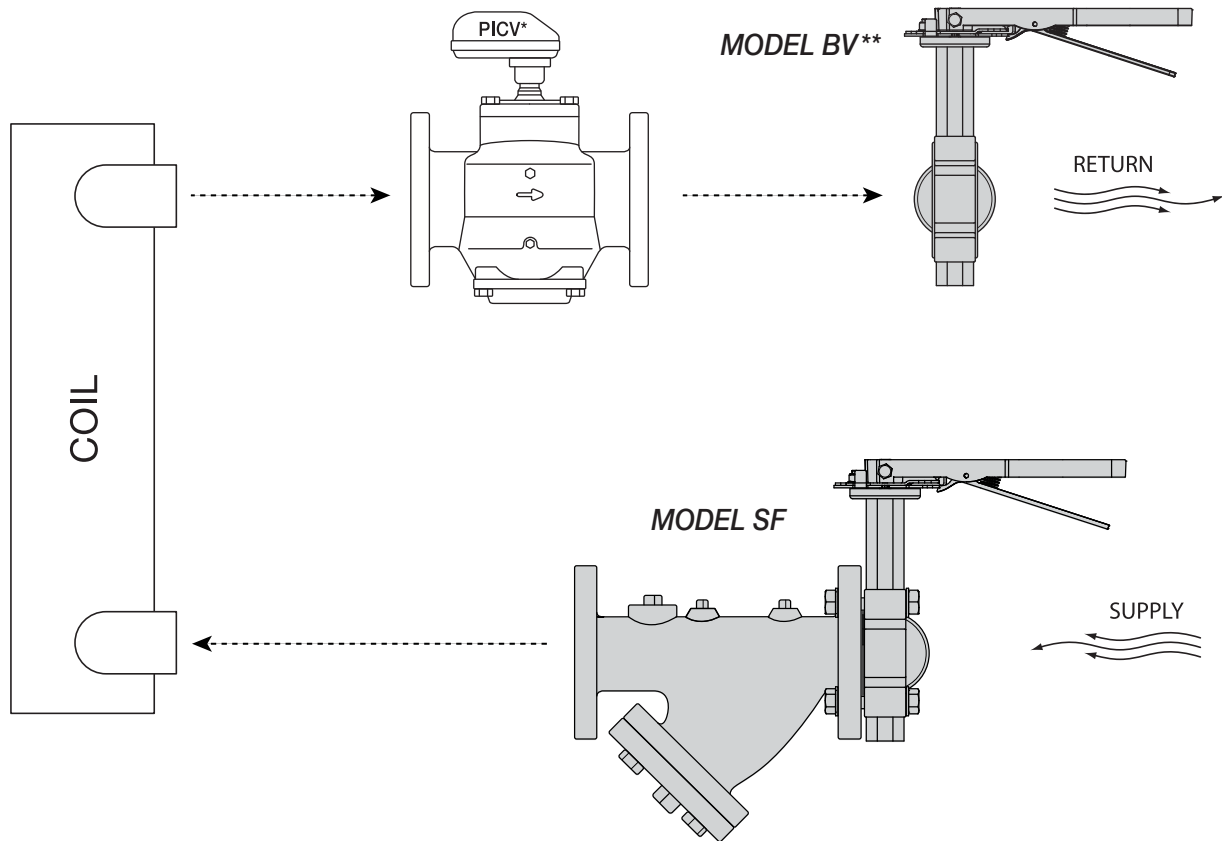

* Pressure Independent Control Valve (PICV) pipe and fittings illustrated above are by others and not supplied.

** A spacer may be required to mount the BV Butterfly Valve directly to PICV.

MODEL SF

SF Combination Strainer Valve is a "Y" (wye) strainer with removable stainless steel strainer screen, bolted cover with blow down connection and ANSI 125# Flanged End Connections. Mounted on the inlet is a ductile iron Lug Type Butterfly Valve. Strainer body features three threaded Accessory Ports.

MODEL BV

BV Butterfly Valves are Lug Type. Its heavy duty one piece body is designed to be installed between all types of ANSI 125/150 flanges. Resilient seat provides bubble tight shut off. Blowout proof stem with pinned disc. Universal mounting flange conforms to ISO-5211.

| QUANTITY | SIZE | GPM | TAG |
|----------|------|-----|-----|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |