


## SG 2.50" - 12.00" "Y" (WYE) Cast Iron Strainer With Butterfly Valve

NuTech Model SF with Groove X Flange Adaptors

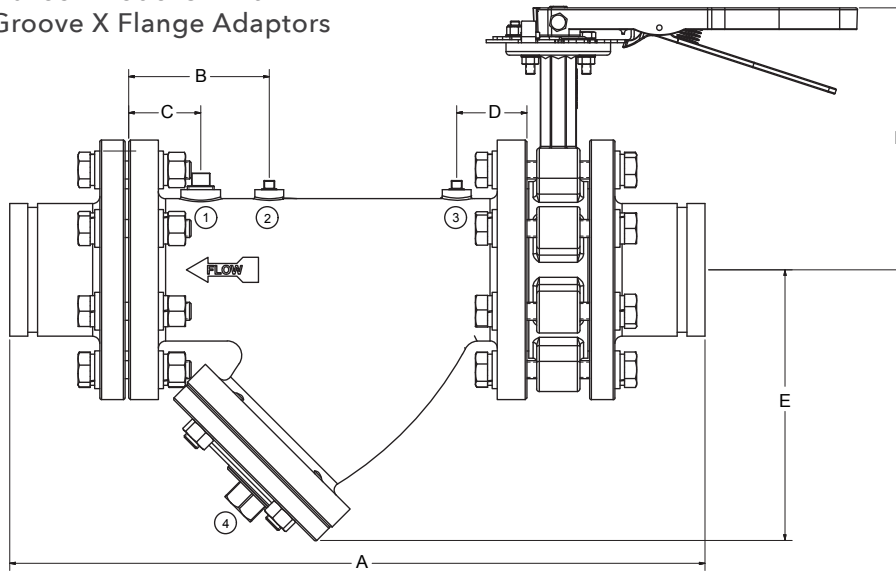

### NOMINAL DIMENSIONS, WEIGHTS & FLOWS

MODEL	SIZE			A	B	C	D	E	F	1	2	3	4	WEIGHT	
	in	mm								NPT	NPT	NPT	NPT	lbs	kg
SG-250	2.5"	65	in	18.96	5.00	3.00	3.00	7.60	8.15	0.75"	0.25"	0.25"	1.0"	65.6	29.8
			mm	481.58	127.00	76.20	76.20	193.00	207.00						
SG-300	3.0"	80	in	19.73	6.00	3.00	3.00	8.30	8.39	0.75"	0.25"	0.25"	1.0"	78.0	35.4
			mm	501.14	152.40	76.20	76.20	210.80	213.00						
SG-400	4.0"	100	in	22.09	7.00	3.00	3.00	10.10	9.13	0.75"	0.25"	0.25"	1.25"	118.6	57.8
			mm	561.08	177.80	76.20	76.20	256.50	232.00						
SG-500	5.0"	125	in	28.38	9.00	3.50	3.50	11.90	9.65	0.75"	0.25"	0.25"	1.25"	179.2	81.3
			mm	720.85	228.60	88.90	88.90	302.30	245.00						
SG-600	6.0"	150	in	30.82	10.00	4.00	4.00	17.40	10.16	0.75"	0.25"	0.25"	1.50"	221.2	100.3
			mm	782.83	254.00	101.60	101.60	442.00	258.00						
SG-800	8.0"	200	in	36.52	12.00	4.00	4.00	17.40	13.50	0.75"	0.25"	0.25"	1.50"	408.2	185.2
			mm	927.61	304.80	101.60	101.60	442.00	343.00						
SG-1000	10.0"	250	in	42.21	15.00	5.00	5.00	20.88	14.75	0.75"	0.25"	0.25"	2.00"	639.6	290.1
			mm	1072.14	381.00	127.00	127.00	530.35	375.00						
SG-1200	12.0"	300	in	48.91	17.00	5.00	5.00	23.31	16.50	0.75"	0.25"	0.25"	2.00"	884.6	401.3
			mm	1242.32	431.80	127.00	127.00	592.00	419.00						

Nominal Dimensions & Weights shown above are not to be used for construction purposes unless first certified by the Factory.

### ORDERING DESIGNATION



#### AVAILABLE OPTIONS

\*Optional Accessories are an extra charge and not included in the standard model price.

#### Accessory Designations:

BA	Buy American Construction	EV	Extended Manual Air Vent
BB#	Use Union End Ball Valve for Drain Valve - Specify Size:	DV-050	Drain Valve (3.00" - 6.00")
	BB2, BB3 or BB4	HT	Hanging Tag (Plastic)
BT	Bag & Tag	PX	Extended Pressure/ Temperature Vent
CC	Connection Charge	PT/SX	Single Extended Pressure/ Temperature Port

