


GF Grove X Flange Adapter

NuTech's GF Accessory is a fabricated Groove X Flange Adapter for Steel Valves and Strainers. 150# Plate Flange with Schedule 40 Grooved Steel Pipe section.

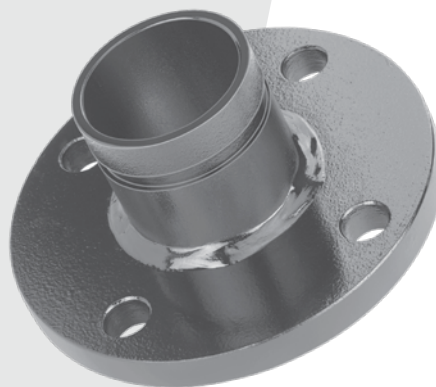


PRODUCT INFORMATION

PART	MATERIALS
Flange	Steel
Pipe Section	Steel, Schedule 40
End Connection	150# Plate Flange X Schedule 40 Steel Pipe

SPECIFICATIONS


Function:	Groove X Flange Adapter
Sizes:	2.50" - 12.00"
Ratings:	Pressures to 200 PSIG (1380 kPa) Temperatures to 250° F (120° C)

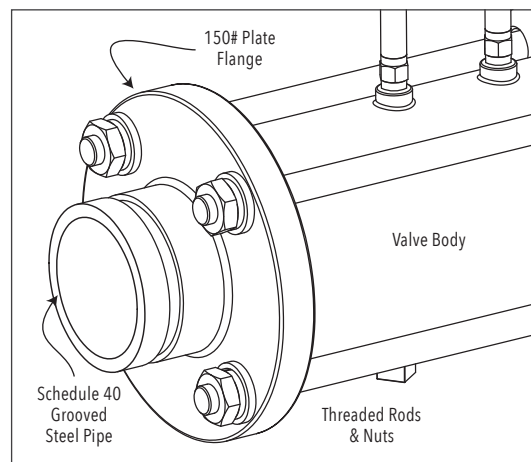

CONNECTIONS

MODEL	SIZE	CONNECTION
GF - 250	2.50" 65 mm	150# Plate Flange X with Schedule 40 Grooved Steel Pipe
GF - 300	3.00" 80 mm	150# Plate Flange X with Schedule 40 Grooved Steel Pipe
GF - 400	4.00" 100 mm	150# Plate Flange X with Schedule 40 Grooved Steel Pipe
GF - 500	5.00" 125 mm	150# Plate Flange X with Schedule 40 Grooved Steel Pipe
GF - 600	6.00" 150 mm	150# Plate Flange X with Schedule 40 Grooved Steel Pipe
GF - 800	8.00" 200 mm	150# Plate Flange X with Schedule 40 Grooved Steel Pipe
GF - 1000	10.00" 250 mm	150# Plate Flange X with Schedule 40 Grooved Steel Pipe
GF - 1200	12.00" 300 mm	150# Plate Flange X with Schedule 40 Grooved Steel Pipe

GF 2.50" - 12.00" Groove X Flange Adapter

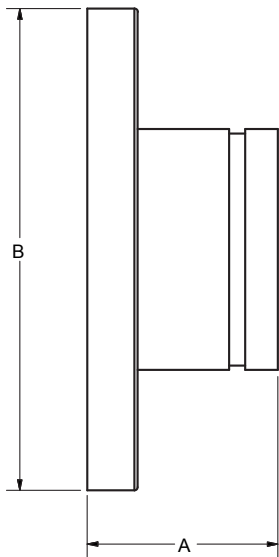

NOMINAL DIMENSIONS & WEIGHTS

MODEL	FLANGE PIPE SIZE	"A"		"B"		WEIGHT	
		INCH	MM	INCH	MM	LB	KG
GF-250	2.50" 65mm	3.00"	76.2	7.00	177.8	8.3	3.76
GF-300	3.00" 80mm	3.00"	76.2	7.50	190.5	10.0	4.54
GF-400	4.00" 100mm	3.00"	76.2	9.00	228.6	13.8	6.26
GF-500	5.00" 125mm	4.00"	101.6	10.00	254.0	17.1	7.76
GF-600	6.00" 150mm	4.00"	101.6	11.00	279.4	21.1	9.57
GF-800	8.00" 200mm	6.00"	152.4	13.50	342.9	40.1	18.19
GF-1000	10.00" 250mm	6.00"	152.4	16.00	406.4	54.8	24.86
GF-1200	12.00" 300mm	6.00"	152.4	21.00	533.4	85.3	38.69

Nominal Dimensions & Weights shown above are not to be used for construction purposes unless first certified by the Factory.

ORDERING DESIGNATION

GF - 300

ACCESSORY

Model GF-300 (Shown)

SIZE

3.00" (Shown)